

EXEMPLES : GLUED MULTI WIRE STAPLE BAND

Description : Flattened wires glued into bands for production of industrial and office staples.


Steel : 0,06 to 0,50 % carbon.

Tensile strenght : 800 to 1 400 N/mm².

Coating : Bright, galvanised, coppered.

Aspect : Neutral ou coloried.

Dimensions et tolérances :

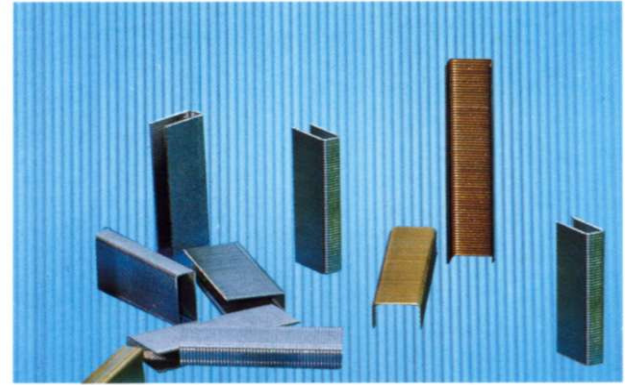

Dimension 1/100 mm	Number of wire	Dimension and tolerance 1/100 mm
75 x 52	165-168-179-200	75 ^{±2} x 52 ^{±1,3}
75 x 58	167	75 ^{±2} x 60 ^{+0 -0,2}
91 x 70	100-125	91 ^{±2} x 70 ^{+0 -3}
95 x 66	125	95 ^{+2 -1} x 66 ^{+0 -2}
126 x 104	40 - 56 - 99	126 ^{+1,2 -1} x 104 ^{-1,2 -1}
126 x 89	100	126 ^{±2} x 89 ^{±1}
127 x 105	40	127 ^{±2} x 105 ^{+0 -2}
145 x 130	50	145 ^{±2} x 130 ^{+0 -3}
157 x 144	45-75	157 ^{±2} x 144 ^{+0 -3}
158 x 135	50-75	158 ^{±2} x 135 ^{±1}
160 x 135	52-75	160 ^{±2} x 135 ^{±1}
162 x 129	50 - 60 - 68 - 70	162 ^{±2} x 129 ^{±1}
163 x 142	40	163 ^{±2} x 142 ^{+0 -2}
165 x 140	80	165 ^{+2 -3} x 140 ^{+2 -0}

Packaging : Reels from 180 to 680 Kg.

Type	REELS									
	T 113					T 300				
Weight of wire (Kg)	350 à 680 depend of characteristic					180 à 490 depend of characteristic				
Ø Flange (mm)	1 150					1 010				
Ø Inside dia. (mm)	81					81				
Ø Core dia. (mm)	523					523				
Height between flange (mm)	80	90	106	130	140	80	90	106	130	140
Height (mm)	224	234	250	274	284	224	234	250	274	284

Please note all weights shown are approximate, and issued for guidance only. All measurement are metric.

Unwinding : Dynamic. Unwinding systems are available on request.

Important characteristics : It is recommended to specify the diameter of your wire requirements in mm.

CONFLANDEY reserves the right to modify any of the above details in the pursuit of improvements in quality and service.

CONFLANDEY INDUSTRIES

3 RUE DU CHATEAU AMONCOURT BP 21 - 70170 PORT SUR SAONE - FRANCE

Tél. : 33 (3) 84.91.38.38 - FAX : 33 (3) 84.91.47.04

contact@conflandey-industries.com