

## EXEMPLES : STEEL MATTRESS WIRE

**Description** : Round wire for the manufacturing of mattress netting.

**Steel** : 0,03 à 0,10 % de carbone.


**Tensile strength** : 700 à 900 N/mm<sup>2</sup>.

**Coating** : Electro-galvanised according to international specifications.

**Diameter** : 0,78 à 1,15 mm.

**Tolerances** : ± 0,01 mm.

**Packaging** : Reels from 400 to 1 000 Kg.

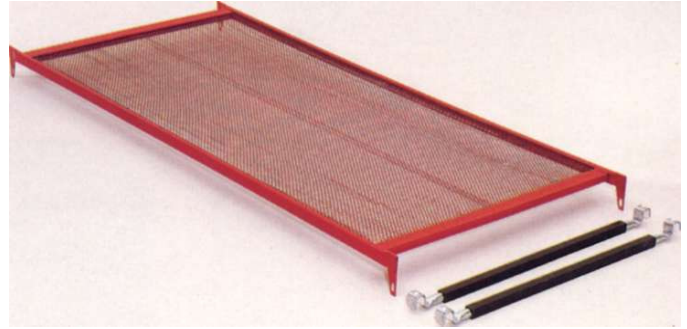

	REELS		
Type	RP 500	RP 700	RP 1000
Weight of wire (Kg)	480	730	980
Ø Flange (mm)	600	750	1 010
Ø Inside dia (mm)	80	80	80
Ø Core dia (mm)	360	472	637
Height (mm)	702	702	539

Please note all weights shown are approximate, and issued for guidance only. All measurement are metric.

**Unwinding** : Static. Unwinding systems are available on request.

**Important characteristics** : It is recommended to specify the diameter of your wire requirements in mm.

CONFLANDEY reserves the right to modify any of the above details in the pursuit of improvements in quality and service.

**CONFLANDEY INDUSTRIES**

3 RUE DU CHATEAU AMONCOURT - BP 21 70170 PORT SUR SAONE - FRANCE

Tél. : 33 (3) 84.91.38.38 - FAX : 33 (3) 84.91.47.04

[contact@conflandey-industries.com](mailto:contact@conflandey-industries.com)